


THE FIRST PHASE OF OUR WORKS WILL INCLUDE...


Pen-Y-Lan Community Centre & Library

We are excavating and installing new drainage, including an attenuation tank along side the library before moving onto work in the carpark.

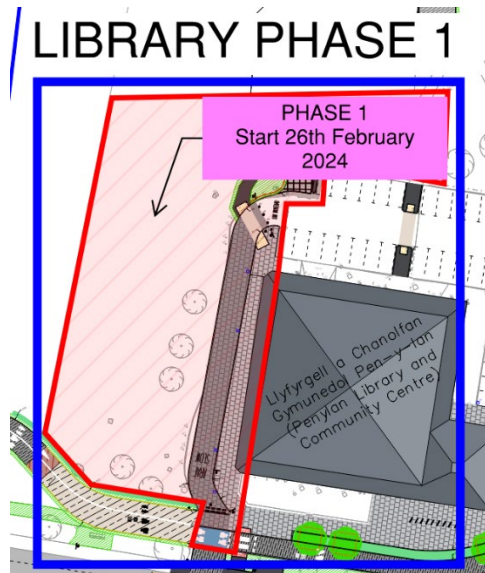


Ninian Road and Wellfield Road Junction

Installing Traffic Management- We will be slightly narrowing the road using cones to facilitate excavation for ducting and drainage, installation of kerbs to new road alignment, installing new footpath paving/surfacing. We will be relocating the current bus stop outside the community Centre/ Library a few metres down Ninian Road to enable us to complete our works and ensure public safety.

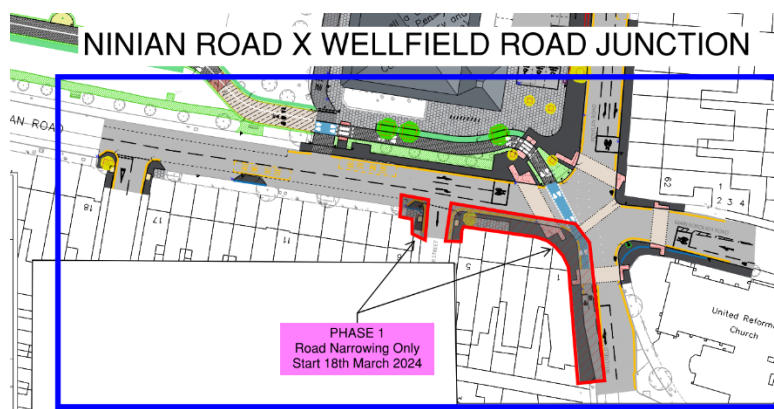


Roath Recreation Ground

We have begun works on the recreation grounds for the footpath/cycle path between Wellfield Road and Alder Road.

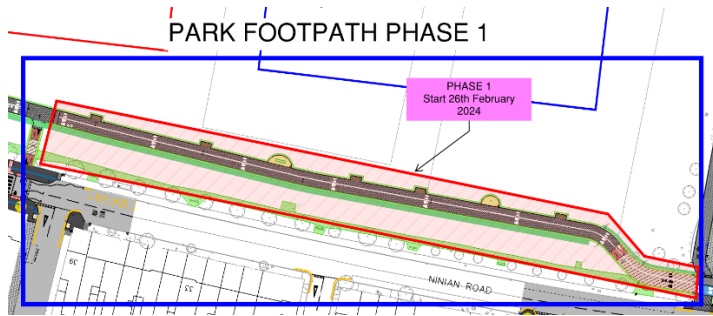

Pen-Y-Wain Place Area

Upgrading the existing footway area and crossing points around the junction. A pedestrian diversion will be in place to ensure the road and pavement remain open to the public.

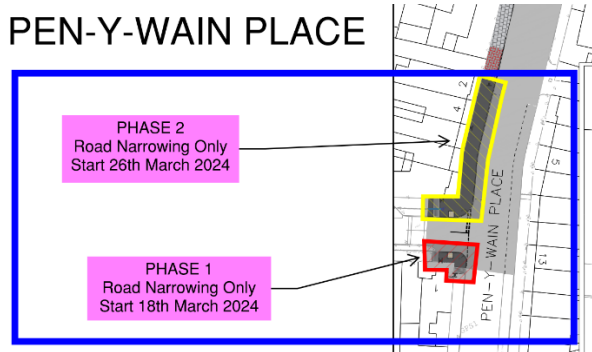

Wellfield Road

Ducting works will be carried out in this area in phases to minimise disruption. We will aim to complete one area of Wellfield Road before beginning another area. This will take approximately 8 weeks to complete. Access to businesses will be maintained throughout the process. This ducting will provide fibreoptic communication links between the traffic signals in the area.

